



COMMERCIAL • INDUSTRIAL • RESIDENTIAL

# ULTIMATE II

**PREMIUM EXTERIOR ACRYLIC LATEX**

**Fortified with Urethane**

- Outstanding Weather Resistance
- Exceptional Durability & Color Retention
- Early-Moisture & Dirt Pick-up Resistance
- Excellent Adhesion over most Surfaces
- Flexible in Changing Temperatures
- Dries to a Uniform, Clean, Long-term Finish



**Paint for All Seasons with Extended Life between Repaints!**



# The Rodda Paint Difference



## Ultimate II Premium Exterior Latex, Rodda Paint's **BEST** Exterior Paint features Exceptional Durability & Color Retention, Excellent Adhesion and Outstanding Moisture & Weather Resistance!

### Description:

Rodda Paint's Ultimate II exterior premium paint is formulated with advanced 100% acrylic resin technology fortified with urethane resin to deliver excellent adhesion over most exterior surfaces. Designed to remain flexible in the changing weather conditions of the Northwest, Ultimate II, a paint for all seasons, exhibits outstanding early-moisture resistance with application down to 35F.

Ultimate II's proprietary variable particle packing technology results in a higher density film which helps deflect harmful UV rays & water intrusion while providing dirt pick-up resistance for exceptional durability & color retention, extending the service life between repaints.

Ultimate II is easy to apply with minimal odor and dries to a beautiful uniform, weather resistant finish that resists mold and mildew growth.

Rodda's Ultimate II is one of the best performing exterior paints available in the US today and is backed by a Limited Lifetime Warranty.


### Recommended Uses:

- Prestigious Residential and Commercial properties
- Performance tested from Alpine to Coastal Environments
- Great for new or repaint projects
- Ideal for properly prepared and primed exterior wood or cementitious siding, masonry and stucco
- Also works well on properly primed galvanized and ferrous metals

**NOTE:** Vinyl siding should only be repainted with light colors to help avoid warping. See and follow siding manufacturer's recommendations.

### Features:

- Outstanding Weather Resistance
- Exceptional Durability & Color Retention
- Early-Moisture & Dirt Pick-up Resistance
- Excellent Adhesion over most Surfaces
- Flexible in Changing Temperatures
- Dries to a Uniform, Clean, Long-term Finish
- Extended Life Between Repaints

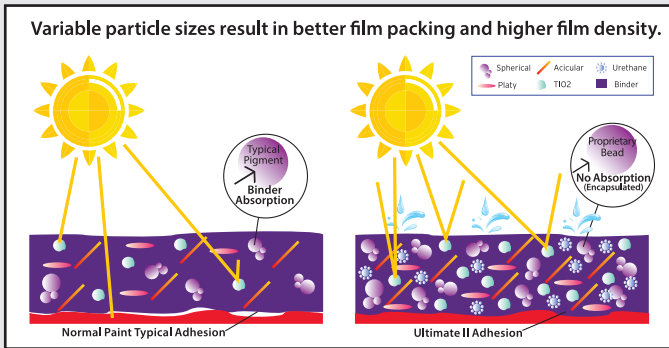

### Ultimate II Technical Data

Sheen	Gloss Level	Base	VOC	Volume Solids	Film Thickness		Reducers	Minimum Application Temperature	Application and Curing at 77F and 50% Relative Humidity	Application Recommendation
					Wet	Dry				
Velvet	1	White	< 45 g/L	37% (Varies by Base and Color)	5.0 mils	1.85 mils	Not normally recommended. Reduce sparingly with water for spray applications.	35F	Dry to Touch: 1.5 hrs Dry to Recoat: 3-6 hrs	Nylon/Polyester Brush 3/8" to 3/4" Nap Synthetic Roller Cover 2000 psi Pressure Airless Spray with .015 - .019 tip
		Deep								
		Neutral								
Satin	2	White	< 90 g/L	38% (Varies by Base and Color)	5.0 mils	1.9 mils	Not normally recommended. Reduce sparingly with water for spray applications.	35F	Dry to Touch: 1.5 hrs Dry to Recoat: 3-6 hrs	Nylon/Polyester Brush 3/8" to 3/4" Nap Synthetic Roller Cover 2000 psi Pressure Airless Spray with .015 - .019 tip
		Deep								
		Neutral								

For additional details please see your Rodda Representative for the Technical Data Sheet (TDS) for this product.

Made in the Northwest, for the Northwest, since 1932.



6107 N. Marine Drive, Portland, OR  
503-521-4300 | 800-452-2315

RoddaPaint.com | Follow Us [f](#) [@](#) [in](#) [v](#)

Ask your Rodda Paint representative about the new Cascadia Color Collection.

